

Part Number	A Nominal Inlet Diameter	B Outside Body Diameter	C Body Length	D Overall Length	E Offset to C/L	F Offset to C/L	G Inlet Length	H Outlet Length
43120P	2.0	7.6	22.4	24.5	3.2	—	2.0	2.1
43125P	2.5	8.1	27.7	30.2	3.9	—	2.5	2.4
43130P	3.0	8.5	30.6	33.6	3.8	—	3.0	2.3
43135P	3.5	9.0	32.8	35.4	4.9	—	3.0	2.6
43140*	4.0	9.0	32.8	35.4	5.4	—	3.0	2.6
43150F	5.0	12.1	30.4	34.2	5.7	—	4.0	3.8
43160F	6.0	14.1	30.6	34.5	6.8	—	4.0	3.9
43180F	8.0	18.1	48.4	53.2	9.2	—	4.0	4.8
43182F	10.0	22.2	50.6	54.3	12.3	—	4.0	3.7
43184F	12.0	22.2	65.6	69.3	14.3	—	4.0	3.7
43186F	14.0	36.2	70.6	73.8	15.3	—	4.0	3.2
43188F	16.0	42.2	84.2	87.5	18.1	—	4.0	3.3
43199F	18.0	42.3	96.2	99.6	19.0	—	4.0	3.3
43121F	20.0	48.3	97.9	101.2	20.0	—	4.0	3.3
43122F	22.0	54.3	99.6	103.5	21.8	—	4.0	3.9
43220P	2.0	8.1	31.7	32.8	3.4	—	2.0	1.9
43225P	2.5	9.0	38.8	40.8	4.4	1.5	2.5	2.0
43230P	3.0	10.1	38.2	41.1	4.1	1.8	3.0	2.9
43235P	3.5	10.1	44.2	47.1	4.6	2.1	3.0	2.9
43240*	4.0	10.1	49.2	51.0	5.1	—	3.0	2.9
43250F	5.0	14.1	43.5	45.7	5.8	2.6	4.0	3.9
43260F	6.0	14.1	57.6	61.5	6.8	3.1	4.0	3.9
43280F	8.0	22.2	56.6	60.3	11.3	—	4.0	3.7
43282F	10.0	22.2	84.7	88.3	11.3	—	4.0	3.6
43284F	12.0	26.2	79.8	83.4	12.9	—	4.0	3.6
43286F	14.0	36.2	94.7	97.9	15.3	—	4.0	3.2
43288F	16.0	42.1	108.2	111.6	16.1	—	4.0	3.4
43299F	18.0	42.2	108.2	111.5	19.1	—	4.0	3.3
43221F	20.0	48.3	134.1	137.1	19.8	—	4.0	3.0
43222F	22.0	54.3	135.6	139.4	21.8	—	4.0	3.8
43320P	2.0	9.0	40.8	42.4	3.9	—	2.0	1.6
43325P	2.5	10.1	46.6	49.3	3.8	—	2.5	2.7
43330P	3.0	11.1	50.0	52.8	4.5	—	3.0	2.8
43335P	3.5	12.1	51.4	54.2	5.2	—	4.0	2.8
43340*	4.0	12.1	58.4	61.2	5.7	1.8	4.0	2.8
43350F	5.0	14.1	63.5	67.4	5.8	2.6	4.0	3.9
43360F	6.0	16.1	72.0	76.4	6.5	3.1	4.0	4.4
43380F	8.0	22.1	78.7	82.3	11.3	—	4.0	3.6
43382F	10.0	26.2	79.9	83.4	12.9	—	4.0	3.5
43384F	12.0	30.2	104.8	108.4	14.4	—	4.0	3.6
43386F	14.0	42.2	108.2	111.6	16.1	—	4.0	3.4
43388F	16.0	42.2	156.2	159.6	16.1	—	4.0	3.4
43399F	18.0	48.2	134.0	137.0	19.9	—	4.0	3.0
43321F	20.0	54.3	159.7	162.9	22.1	—	4.0	3.2
43322F	22.0	60.3	161.3	164.1	22.6	—	4.0	2.8
43440F	4.0	14.1	66.6	69.3	5.8	4.0	3.0	2.7
43450F	5.0	16.1	72.4	77.0	6.0	4.7	4.0	3.8
43460F	6.0	18.1	82.6	86.3	6.8	5.0	4.0	3.7
43480F	8.0	26.2	91.8	95.5	10.9	—	4.0	3.7
43482F	10.0	30.2	104.8	108.4	12.4	—	4.0	3.6
43484F	12.0	36.2	130.6	133.8	14.3	—	4.0	3.2
43486F	14.0	42.2	132.2	135.6	16.1	—	4.0	3.4


Industrial

Residential

Critical

Hospital

## Type 3 Standard Engine Silencers

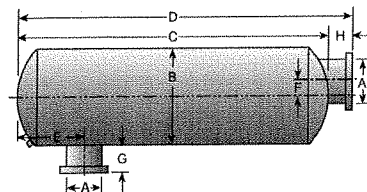

### Side-In, End-Out Design

#### Industrial Grade

12–18 dB attenuation

#### Residential Grade

18–25 dB attenuation

#### Critical Grade

25–35 dB attenuation

#### Hospital Grade

35–42 dB attenuation

\*Specify "F" for flanged, "P" for pipe threads.  
Drains are standard on all silencers with a 9" body diameter or larger.  
Specifications are subject to change without notice; all dimensions are in inches.